- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers and Flat Packages, and Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

description


These devices contain four independent 2-input AND gates.

The SN5408, SN54LS08, and SN54S08 are characterized for operation over the full military temperature range of $-55\,^{\circ}\text{C}$ to 125 $^{\circ}\text{C}$. The SN7408, SN74LS08 and SN74S08 are characterized for operation from 0 $^{\circ}$ to 70 $^{\circ}\text{C}$.

FUNCTION TABLE (each gate)

INP	UTS	OUTPUT
Α	В	Υ
Н	Н	Н
L	X	L
х	L	L

logic symbol†




[†] This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, N, and W packages.

SN5408, SN54LS08, SN54S08 . . . J OR W PACKAGE SN7408 . . . J OR N PACKAGE SN74LS08, SN74S08 . . . D, J OR N PACKAGE (TOP VIEW)


1A 🗆	1	U14] VC	С
18 🗆	2	13 4B	
1Y 🗆	3	12 4A	
2A 🗆	4	11 AY	
28 □	5	10 3B	
2Y 🗆	6	9 3A	
	7	8 3Y	

SN54LS08, SN54S08 . . . FK PACKAGE (TOP VIEW)





NC-No internal connection

logic diagram (positive logic)



schematics (each gate)

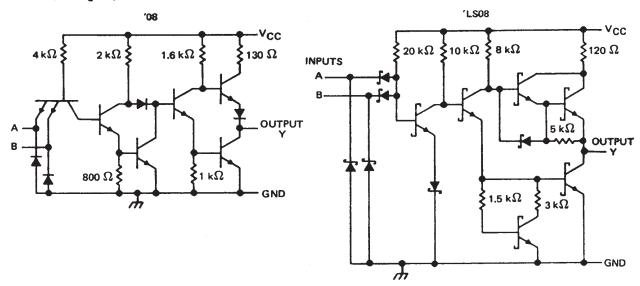

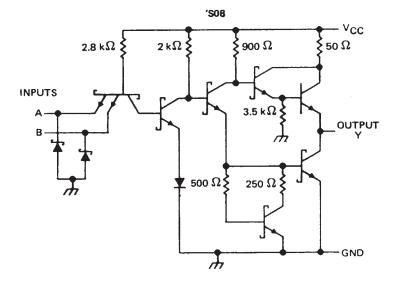

Resistor values are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)		7 V
Input voltage: '08, 'S08		5.5 V
Operating free-air temperature range:	SN54'	. –55°C to 125°C
	SN74'	0°C to 70°C
Storage temperature range		. –65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.



recommended operating conditions

		SN5406	3	SN7408			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC Supply voltage	4.5	5	5.5	4.75	5	5.25	٧
VIH High-level input voltage	2			2			٧
V _{IL} Low-level input voltage			0.8			8.0	٧
IOH High-level output current			- 0.8			- 0.8	mA
IOL Low-level output current			16			16	mA
TA Operating free-air temperature	- 55		125	0		70	°c

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

				SN540	3		SN740	В	UNIT
PARAMETER		TEST CONDITIONS T	MIN	TYP\$	MAX	MIN	TYP‡	MAX	Civil
VIK	V _{CC} = MIN,	I ₁ = - 12 mA			<i>–</i> 1.5			- 1.5	٧
Voн	V _{CC} = MIN,	V _{1H} = 2 V, I _{OH} = -0.8 mA	2.4	3.4		2.4	3.4		.V
VOL	V _{CC} = MIN,	V _{IL} = 0.8 V, I _{OL} = 16 mA		0.2	0.4		0.2	0.4	V
l _į	V _{CC} = MAX,	V _I = 5.5 V			1			1	mA
1н	V _{CC} = MAX,	V ₁ = 2.4 V			40			40	μΑ
l _I L	V _{CC} = MAX,	V ₁ = 0.4 V			- 1.6			- 1.6	mA
IOS§	V _{CC} = MAX		- 20		- 55	- 18		- 55	mA
¹ ССН	V _{CC} = MAX,	V ₁ = 4.5 V		11	21		11	21	mA
¹ CCL	V _{CC} = MAX,	V ₁ = 0 V		20	33		20	33	mA

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$ (see note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CON	MIN	TYP	MAX	UNIT	
tPLH					_	17.5	27	ns
tPHL.	A or B	Y	R _L = 400 Ω,	C _L = 15 pF		12	19	ns

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.



[‡] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$. § Not more than one output should be shorted at a time.

recommended operating conditions

			SN54LS	08		SN74LS	808	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNII
vcc	Supply voltage	4.5	5	5.5	4.75	5	5.25	٧
VIН	High-level input voltage	2			2			٧
VIL	Low-level input voltage			0.7			0.8	٧
ЮН	High-level output current			- 0.4			- 0.4	mA
lOL	Low-level output current			4			8	mA
TA	Operating free-air temperature	- 55		125	0		70	°c

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

				:	3N54L9	08		SN74LS	08	UNIT
PARAMETER		TEST CONDIT	TONS I	MIN	TYP‡	MAX	MIN	TYP‡	MAX	UNIT
VIK	VCC = MIN,	I ₁ = - 18 mA				- 1.5			- 1.5	٧
Voн	V _{CC} = MIN,	V _{IH} = 2 V,	I _{OH} = - 0.4 mA	2.5	3.4		2.7	3.4		٧
V -	V _{CC} = MIN,	VIL = MAX,	I _{OL} = 4 mA		0.25	0.4		0.25	0.4	V
VOL	V _{CC} = MIN,	VIL = MAX,	IOL = 8 mA					0.35	0.5	·
11	V _{CC} = MAX,	V ₁ = 7 V				0.1			0.1	mA
ТН	V _{CC} = MAX,	V _I = 2.7 V				20			20	μΑ
11L	V _{CC} = MAX,	V1 = 0.4 V				- 0.4			0.4	mA
los§	V _{CC} = MAX			- 20		100	- 20		- 100	mA
1ссн	V _{CC} = MAX,	V ₁ = 4.5 V			2.4	4.8		2.4	4.8	mA
ICCL	V _{CC} = MAX,	V1 = 0 V			4.4	8.8		4.4	8.8	mA

switching characteristics, VCC = 5 V, TA = 25°C (see note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CON	MIN	TYP	MAX	UNIT	
tPLH	A or B	V	$R_1 = 2 k\Omega$,	C 15 oF		8	15	ns
^t PHL	A OF B	'	11[- 2 K34,	C _L = 15 pF		10	20	ns

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.



[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. ‡ All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$ § Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

recommended operating conditions

			SN54	808		SN74S0	8	UNIT
		MIN	NON	MAX	MIN	NOM	MAX	UNII
Vcc	Supply voltage	4.5		5.5	4.75	5	5.25	٧
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8		_	0.8	V
ЮН	High-level output current			- 1			– 1	mA
loL	Low-level output current			20			20	mA
TA	Operating free-air temperature	- 55		125	0		70	°c

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

					SN54S0	8		SN74S0	8	UNIT
PARAMETER		TEST CONDIT	TIONS T	MIN	TYP‡	MAX	MIN	TYP‡	MAX	UNIT
VIK	V _{CC} = MIN,	I ₁ = -18 mA				-1.2			-1.2	٧
VOH	V _{CC} = MIN,	V _{1H} = 2 V,	I _{OH} = -1 mA	2.5	3.4		2.7	3.4		٧
V _{OL}	V _{CC} = MIN,	V _{1L} = 0.8 V	1 _{OL} = 20 mA			0.5			0.5	٧
11	V _{CC} = MAX,	V _I ≈ 5.5 V				1			1	mA
ЧН	V _{CC} = MAX,	V _I = 2.7 V				50			50	μΑ
¹ IL	V _{CC} = MAX,	V ₁ = 0.5 V				-2			-2	mA
IOS§	V _{CC} = MAX			-40		-100	-40		-100	mA
Іссн	V _{CC} = MAX,	V _I = 4.5 V			18	32		18	32	mA
ICCL	V _{CC} = MAX,	V _I = 0 V			32	57		32	57	mA

¹ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

switching characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$ (see note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
tPLH			$R_1 = 280 \Omega$, $C_1 = 15 pF$		4.5	7	ns
^t PHL	4 . 5	V	NC - 200 32, CE - 13 pr		5	7.5	ns
^t PLH	A or B	Y	R ₁ = 280 Ω, C ₁ = 50 pF		6		ns
tPHL_			R _L = 280 Ω, C _L = 50 pF		7,5		ns

NOTE 2: Load circuits and voltage waveforms are shown in Section 1.



[‡] All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^{\circ}\text{C}$. § Not more than one output should be shorted at a time, and the duration of the short-circuit should not exceed one second.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1999, Texas Instruments Incorporated